accucold

ARG49ML



83.75" x 55.25" x 31" (H x W x D)

Performance series Pharma-Lab 49 cu.ft. all-refrigerator in stainless steel with glass doors

Highlights:

Intelligent microprocessor digital temperature controller

Improved temperature accuracy with a separate temperature probe for continuous product readout

Additional sensor reads interior air temperature for superior temperature control

Product Features:


Purpose-built design	Designed and engineered to store vaccines and other sensitive materials under stable temperature conditions
Glass doors	Full display of the interior, with an anti-condensate door frame heater to ensure a clear view
Adjustable temperature	Interior is pre-set to 5ºC, with an adjustable control range from 2 to 10ºC
Temperature alarm	Visual and audible alarms alert if the interior temperature rises or falls out of set range
Complete stainless steel construction	Interior and exterior are entirely constructed from stainless steel for lasting durability and easy cleanup
Forced air cooling	Top-mounted commercial fan ensures rapid temperature recovery
Automatic defrost with adjustable cycle defrost	Adjustable cycle defrost operation ensures the unit avoid temperature spikes and ice buildup
Self-closing doors	Two doors close to save energy but will remain open when the door is opened at a 90º angle for easier loading
Open door alarm	Alarm will beep 3 times if the door is left open for 30 seconds, 5 times at 60 seconds, and will sound continuously if the door is open for more than 5 minutes

ACCUCOLD DIVISION, FELIX STORCH, INC. | ISO 9001:2015 Certified
770 Garrison Avenue Bronx, NY 10474 USA **TEL** 718-893-3900 **FAX** 844-478-8799
info@accucold.com **www.accucold.com**

accucold

ARG49ML Specifications:

Overview	
Nominal Height	84.0" (213 cm)
Height of Cabinet	83.75" (213 cm)
Nominal Width	56.0" (142 cm)
Width	55.25" (140 cm)
Nominal Depth	31.0" (79 cm)
Depth	31.0" (79 cm)
Depth with Handle	32.75" (83 cm)
Depth with door at 90°	56.5" (144 cm)
Capacity	49.0 cu.ft. (1388 L)
Defrost Type	Automatic
Door	Glass
Cabinet	Stainless Steel
US Electrical Safety	UL
Canadian Electrical Safety	ULC
Sanitation	ETL-S
Amps	7.5
Voltage/Frequency	115 V AC/60 Hz
Weight	410.0 lbs. (186 kg)
Parts & Labor Warranty	2 Years
Compressor Warranty	5 Years
UPC	761101062341
Refrigerator Features	
Door Swing	French
Shelf Type	Wire
Shelf Qty	8
Adjustable Shelves	Yes
Thermostat Type	Digital
Fan Type	Interior
Refrigerant Type	R290
Refrigerant Amount	3.2oz.
High Side PSI	290.0
Low Side PSI	155.0
Wheel Qty	4
Interior Light	Yes
Temperature Range	2 to 10ºC
Dimensions	
Interior Height	51.5" (131 cm)
Interior Width	50.5" (128 cm)
Interior Depth	27.0" (69 cm)

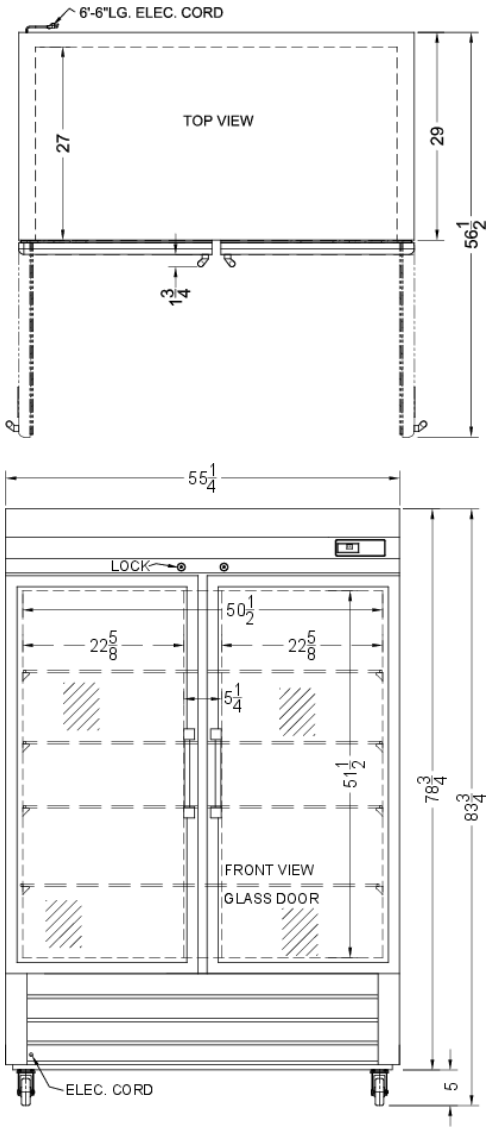

ACCUCOLD DIVISION, FELIX STORCH, INC. | ISO 9001:2015 Certified
770 Garrison Avenue Bronx, NY 10474 USA **TEL** 718-893-3900 **FAX** 844-478-8799
info@accucold.com **www.accucold.com**